

MARKET PLACE

• FLOORING •

www.marketplacefloors.com

ENGINEERED VINYL PLANK Original



PHthalates
FREE

MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.

Address: Economic Development Langxi Anhui, CHINA

Tel: +86-563-7375880 Fax: +86-563-7373880

Web: www.omivinyl.com

PRODUCT DESCRIPTION

Market Place engineered vinyl flooring is designed for use in commercial and residential applications. Market Place collection features a natural wood look with a rugged 20 mil wear layer. It is topped with UV cured ceramic finish which permits maximum durability ensuring long lasting beauty without the use of a floor finish. The top layer is composed entirely of a 100% VIRGIN PVC. The extruded core* has a composition of 85% Virgin PVC and 15% Limestone. Market Place has a 1.5mm cork backing which gives maximum sound reduction and insulation. The 5G locking system is one of the most advanced connecting systems on the market. It is the fastest and easiest way to install Market Place flooring. Market Place flooring has excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy duty performance requirements. The surface includes a micro bevel embossed surface to enhance the unique texture of wood while adding slip resistance qualities to the plank. Market Place engineered vinyl is a perfect choice for basements, homes, offices, banks, healthcare facilities, residential or commercial condominiums. It is exceptional where both function and high design are essential and 100% waterproof.

AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 1/4" (8 mm) Size: 7" x 48"

Packaging: 10 pieces per carton (23.64 sq. /ft. per Carton)

Pallet: 55 cartons, 18 pallets on container

TECHNICAL DATA

Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060

slip resistance Passes ADA/OSHA standard -

ASTM F970, Static Load - .004 inch Passes 250

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color - $\Delta E < 8$ Avg

ASTM F1515, Light Stability of Color - $\Delta E < 8$ Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction STC 64db

ASTM F2753 Rolling load over Resilient .024 inch

ASTM C518 Thermal Resistance R Value .057

PSI: 900lb

TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

WARRANTY


Limited One (1) Year Manufacturer's Warranty

Limited Fifteen (15) Year Commercial Wear Warranty


Lifetime Residential Wear Warranty

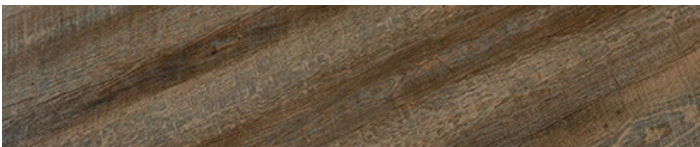

CAROLINA RUSTIC EVP48243C

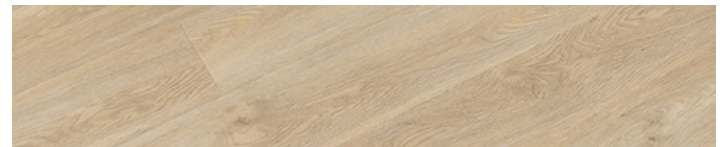


EVERYDAY OAK EVP48205C

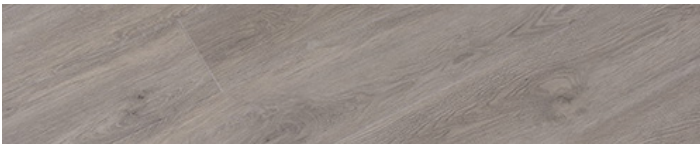


HATTERAS OAK EVP48206C



LEXINGTON HICKORY EVP48248C

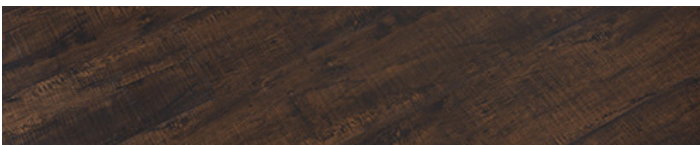

RUSTIC MAPLE EVP48232C

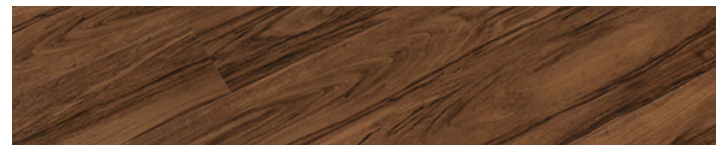

SOUTHERN PECAN EVP48236C