

# MARKET PLACE

• FLOORING •

[www.marketplacefloors.com](http://www.marketplacefloors.com)

RIGID PLUS FLOORS



PHthalates  
**FREE**

## MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.

Address: Economic Development Langxi Anhui, CHINA

Tel: +86-563-7375880 Fax: +86-563-7373880

Web: [www.omivinyl.com](http://www.omivinyl.com)

## PRODUCT DESCRIPTION

Market Place RPF is designed for use in commercial and residential applications. The Market Place RPF collection features a rustic natural wood look with a rugged 20 mil wear layer. It is topped with UV cured ceramic finish which permits maximum durability ensuring long lasting beauty without the use of a floor finish. The top layer is composed entirely of a 100% VIRGIN PVC and the extruded core has a composition of 100% Limestone. Market Place RPF has a 1mm XPE foam backing which gives maximum sound reduction and insulation. The 5G locking system is one of the most advanced connecting systems on the market. It is the fastest and easiest way to install Market Place flooring. The Market Place flooring has excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy duty performance requirements. The surface includes a micro bevel embossed and sawtooth surface to enhance the unique texture of wood while adding slip resistance qualities to the plank. The Market Place RPF is a perfect choice for basements, homes, offices, banks, healthcare facilities, residential or commercial condominiums. It is exceptional where both function and high design are essential and 100% waterproof.

## AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 5mm with 1mm XPE attached padding Size: 7" x 48"

Packaging: 10 pieces per carton (23.34 sq. /ft. per Carton)

Pallet: 60 cartons, 14 pallets on container

## TECHNICAL DATA

### Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

### Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

### General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060 slip resistance Passes ADA/OSHA standard -

ASTM F970, Static Load - .004 inch Passes 250

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color -  $\Delta E < 8$  Avg

ASTM F1515, Light Stability of Color -  $\Delta E < 8$  Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction STC 64db

ASTM F2753 Rolling load over Resilient .024 inch

ASTM C518 Thermal Resistance R Value .057

PSI: 2000lb

## TECHNICAL ASSISTANCE

Please contact your local rep or call 336-781-3816

## WARRANTY


Lifetime Manufacturer's Warranty

Limited Fifteen (15) Year Commercial Wear Warranty

Lifetime Residential Wear Warranty




WHISPERING PINE RPF44201C

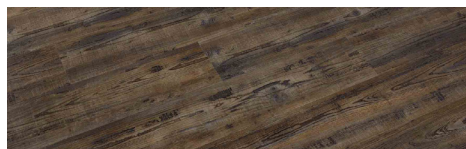


OAK RIDGE RPF44202C




WRIGHTSVILLE RPF44203C

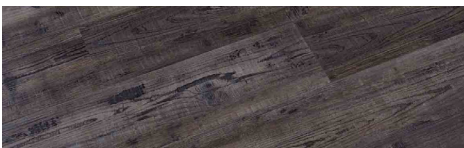

JAMESTOWN RPF44204C

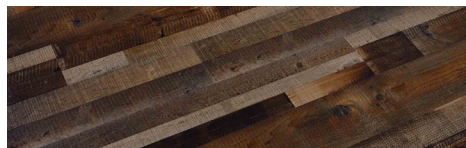


CATAWBA RPF44205C

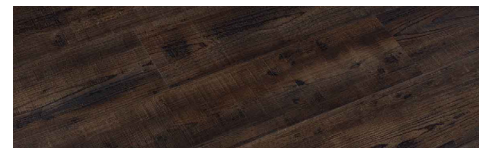

WINSTON RPF44207C



SOUTHPORT RPF44209C

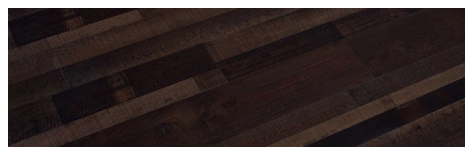

SEAGROVE RPF44210C